
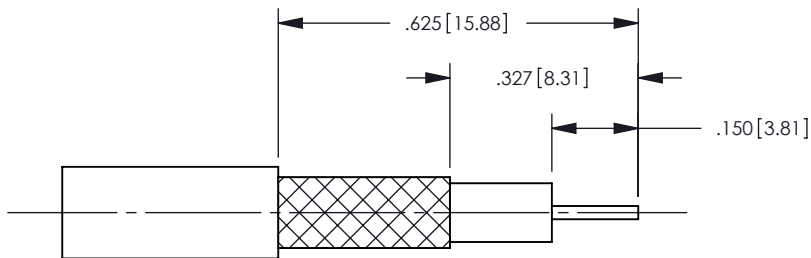


NOTES: UNLESS OTHERWISE SPECIFIED

1. DESIGNED FOR USE WITH BELDEN 1855A, GEPCO VDM230 OR EQUIVALENT CABLE.
2. MATERIAL SPECIFICATIONS:
 BODY: BRASS PER ASTM B16.
 OUTER CONTACT & CENTER CONTACT: COPPER ALLOY.
 INSULATOR: TEFLON PER ASTM D1710.
 FERRULE: BRONZE C22000.
3. FINISH SPECIFICATIONS:
 BODY: .000100 MIN NICKEL PER AMS-QQ-N-290 OVER COPPER FLASH PER ASTM B734 (RoHS).
 OUTER CONTACT & CENTER CONTACT: .000030 MIN GOLD PER ASTM B488 OVER .000080 MIN NICKEL PER AMS-QQ-N-290 (RoHS).
 FERRULE: .000050 MIN NICKEL PER AMS-QQ-N-290 OVER .000050 MIN COPPER FLASH PER ASTM B734 (RoHS).
4. ELECTRICAL SPECIFICATIONS:
 IMPEDANCE: 75 OHMS
 FREQUENCY RANGE: DC-3GHz
 VSWR: 1.25 MAX DC-3 GHz
5. FERRULE AND CONTACT SHIPPED LOOSE.
6. INTERFACE PER CECC 22230.
7. CAP-E03
8. CRIMP FERRULE (.178 HEX) AND CONTACT (.042 HEX) USING KTH-2025.

REV	DESCRIPTION	BY DATE	APPD
01	PRELIMINARY DRAWING SUBJECT TO REVISION PER EWR08-ER10502	RF 10/02/08	DCam

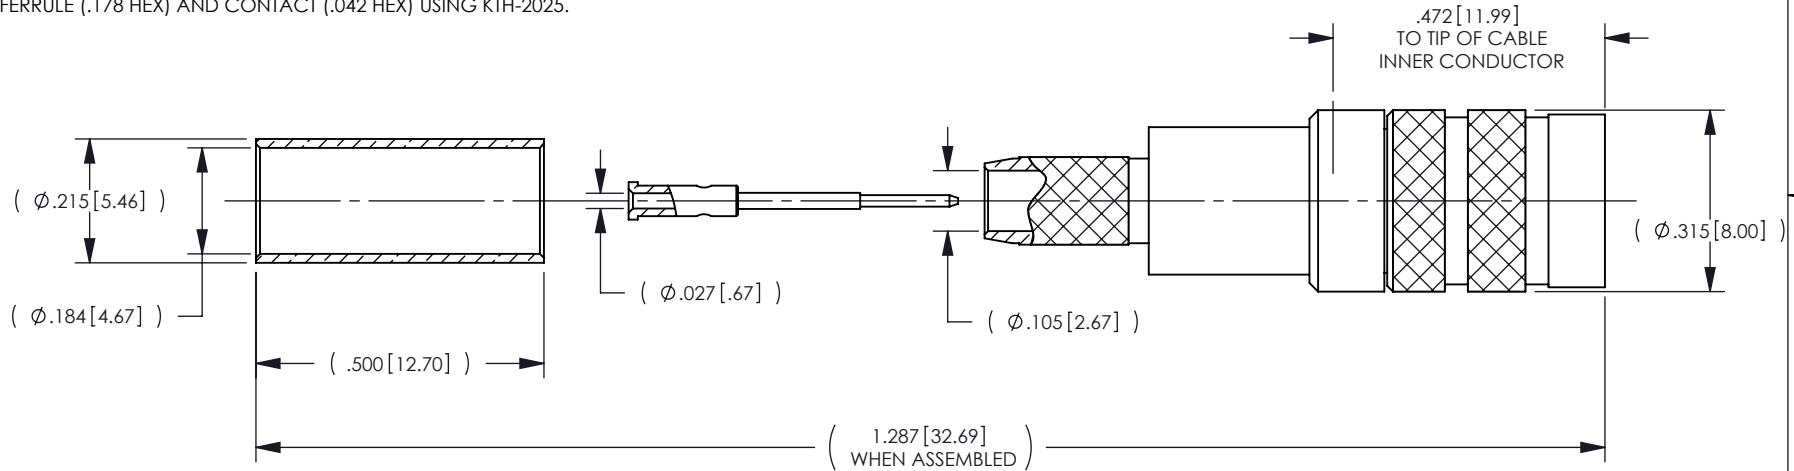

CATALOG P/N: **0345-E00-C7202N**

PER ASME Y14.5M-1994 UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES [MM] TOLERANCES: DECIMAL: .XX [X.X] ± .01 [0.3] .XXX [X.XX] ± .005 [0.13] .XXXX [X.XXX] ± .XXXX ANGLES: ± 2° SCALE: X:X				by WINCHESTER ELECTRONICS		Winchester Electronics Corporation 62 Barnes Industrial Road North Wallingford, Connecticut 06492	
CUSTOMER SALES DRAWING				THIRD ANGLE		75 OHM 1.0/2.3 PLUG (CRIMP/CRIMP) FOR BELDEN 1855A, GEPCO VDM230 CABLE OR EQUIVALENT (RoHS COMPLIANT)	
DRAWN	DATE	APPROVED	DATE	DATE	DATE	SHT	OF
RF	09/29/08	DCam	10/1/08			1	1
APPROVED	DATE	APPROVED	DATE				
M. AYUB	10/1/08	B. LARSEN	10/1/08				
A SD0345-E00-C7202N							REV
						1	01