


## Cat6a S/FTP Solid LSZH Cable 305m Reel

Y8700 305m Reel

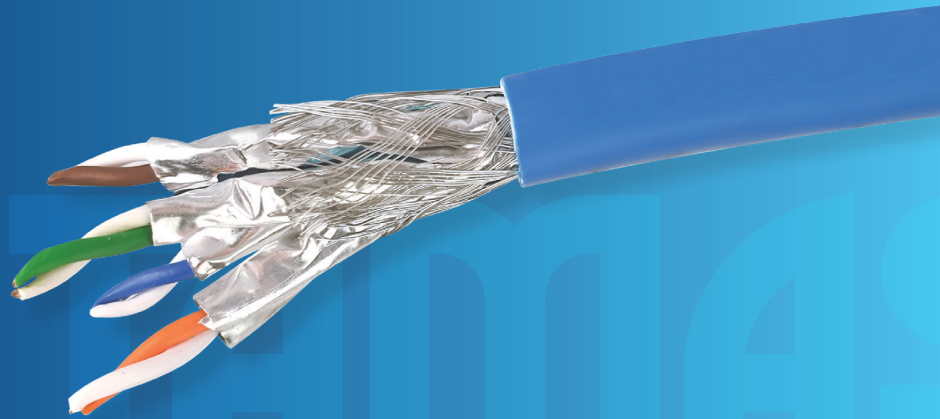


### FEATURES

- Cat6a S/FTP Solid LSZH Cable is ideal for premises wiring and applications where double shielded cable is required. All Datamaster® Ethernet Cables are Fluke® tested and are manufactured to exceed Australian standards.
- Datamaster's 6a Ethernet Cable allows for extremely high data rate transmission of up to 10Gbps and at a frequency of 500Mhz, supporting the fastest ethernet applications.
- Individual foil wrapping maintains the pair separation and the foil shield acts as a cross talk barrier from EMI/RFI from adjacent cables.
- Made from 100% Oxygen-Free Copper, 23AWG Solid Conductors, Shielded 4-Twisted Pairs, Al-Foil and Mylar tape (FTP), Low Smoke Zero Halogen (LSZH), Outer foil shield, Tinned drain wire,
- Supplied on a Reel, with count-down metre-marking and Lifetime limited Warranty. The Cat6A cable is also POE++ compatible.

CAT#	COLOUR	LENGTH	PACKING
Y8700BLU	BLUE	305 Metre	Reel
Y8700GRY	GREY	305 Metre	Reel
Y8700PNK	PINK	305 Metre	Reel
Y8700PUR	PURPLE	305 Metre	Reel
Y8700WHI	WHITE	305 Metre	Reel
Y8700YEL	YELLOW	305 Metre	Reel

### DESIGN & CONSTRUCTION

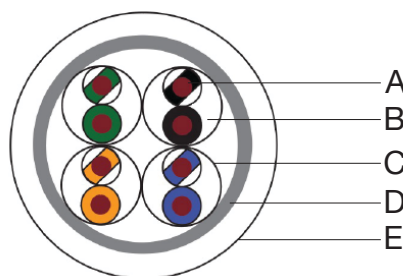

To view Access' extensive ranges go to: [www.accesscomms.com.au](http://www.accesscomms.com.au)

Sydney (Head Office)  
Brisbane Office  
Melbourne Office  
Adelaide Office

Unit 1, 29 Prince William Drive, Seven Hills NSW 2147  
28 The Gateway, Broadmeadows VIC 3047  
71 Anzac Highway, Ashford SA 5035

Phone: (02) 9414 8888  
Phone: (07) 3308 5555  
Phone: (03) 9330 8333  
Phone: (08) 8338 5540

sales@accesscomms.com.au  
brisbane@accesscomms.com.au  
melbourne@accesscomms.com.au  
adelaide@accesscomms.com.au

## Cat6a S/FTP Solid LSZH Cable 305m Reel

Y8700 305m Reel

ITEM	DESCRIPTION	COLOUR	SPECIFICATION	MATERIALS
A	Conductor	Copper	23 AWG 0.565(+/- 0.008)mm	SOLID BARE COPPER
B	Insulation		1.335 mm	Foam PE
C	Foil Screen		50/12 $\mu$ m	Aluminium / MYLAR
D	Braid		0.12mm x 6 x 16	Aluminium & Magnesium
E	Jacket		Minimum Point Thickness (0.51 mm) Outer Diameter $\pm$ 8.20mm +/- 0.3mm	LSZH

FREQUENCY (MHZ)	ATTENUATION	RL	NEXT	PS-NEXT	ACRF	PSACRF	TCL	PROP DELAY
1	2.1	20.0	75.0	72.3	68.0	65.0	40.0	570
4	3.8	23.0	66.3	63.3	56.0	53.0	40.0	552
8	5.3	24.5	61.8	58.8	49.9	46.9	40.0	547
10	5.9	25.0	60.3	57.3	48.0	45.0	40.0	545
16	7.5	25.0	57.2	54.2	43.9	40.9	38.0	543
20	8.4	25.0	55.8	52.8	42.0	39.0	37.0	542
25	9.4	24.3	54.3	51.3	40.0	37.0	36.0	541
31.25	10.5	23.6	52.9	49.9	38.1	35.1	35.0	540
62.5	15.0	21.5	48.4	45.4	32.1	29.1	32.0	539
100	19.1	20.1	45.3	42.3	28.0	25.0	30.0	538
200	27.6	18.0	40.8	37.8	22.0	19.0	27.0	537
250	311	17.3	39.3	36.3	20.0	17.0	26.0	536
300	34.3	16.8	38.1	35.1	18.5	15.5	25.2	536
400	40.1	15.9	6.3	33.3	16.0	13.0	24.0	536
500	45.3	15.2	34.8	31.8	14.0	11.0	23.0	536

### ELECTRICAL CHARACTERISTICS

Resistance Unbalance @ 20°C	2% (max) within a pair 4% (max) between pairs
Conductor Resistance	Max 9.5 ( $\Omega$ /100M) at 20°C
Temperature rating (°C)	75
Voltage rating (V)	30
NVOP	80%
Delay skew at 100MHz @ 20°C	45n/s/100m (max)
Transfer Impedance at 10MHz	100m $\Omega$ (max)
Mean characteristic impedance at 100MHz	100 $\Omega$ $\pm$ 5 $\Omega$
Coupling attenuation (<1GHz) at 100MHz	55db (min)
Insulation Resistance at 20°C	5000M $\Omega$ .m (min)

### ENVIRONMENTAL CHARACTERISTICS

Operation temperature	-40°C - 0°C (under static conditions)
Installation temperature	0°C - 50°C
Storage temperature	-40°C - 70°C (under static conditions)
Pulling tension	100 N Maximum
Bending radius	Minimum 8 x cable diameter (without load)

To view Access' extensive ranges go to: [www.accesscomms.com.au](http://www.accesscomms.com.au)

Sydney (Head Office)  
Brisbane Office  
Melbourne Office  
Adelaide Office

Unit 1, 29 Prince William Drive, Seven Hills NSW 2147  
28 The Gateway, Broadmeadows VIC 3047  
71 Anzac Highway, Ashford SA 5035

Phone: (02) 9414 8888  
Phone: (07) 3308 5555  
Phone: (03) 9330 8333  
Phone: (08) 8338 5540

sales@accesscomms.com.au  
brisbane@accesscomms.com.au  
melbourne@accesscomms.com.au  
adelaide@accesscomms.com.au

## Cat6a S/FTP Solid LSZH Cable 305m Reel

Y8700 305m Reel

### ELECTRICAL PROPERTIES

High frequency performance	Category 6A IEC61156-5, EN50288-4-1, ANSI/TIA 568.2, ISO/IEC11801
Flame retardant standard	UL444 CM, CMR, IEC60332-1, IEC60332-3 part24
LSZH standards	IEC60754-2, IEC61034-1, IEC61034-2
Environmental compliance	RoHS

### REGULATORY COMPLIANCE



Y8700 SERIES COMMUNICATIONS CABLE –  
CAT6a S/FTP ISO/IEC 11801 & TIA/EIA 568C.2  
VERIFIED-23AWG X 4P SOLID - AS/CA S008



To view Access' extensive ranges go to: [www.accesscomms.com.au](http://www.accesscomms.com.au)

**Sydney (Head Office)**  
**Brisbane Office**  
**Melbourne Office**  
**Adelaide Office**

Unit 1, 29 Prince William Drive, Seven Hills NSW 2147  
28 The Gateway, Broadmeadows VIC 3047  
71 Anzac Highway, Ashford SA 5035

Phone: (02) 9414 8888  
Phone: (07) 3308 5555  
Phone: (03) 9330 8333  
Phone: (08) 8338 5540

[sales@accesscomms.com.au](mailto:sales@accesscomms.com.au)  
[brisbane@accesscomms.com.au](mailto:brisbane@accesscomms.com.au)  
[melbourne@accesscomms.com.au](mailto:melbourne@accesscomms.com.au)  
[adelaide@accesscomms.com.au](mailto:adelaide@accesscomms.com.au)