

# **Blackmagic Cloud Dock 2**

Blackmagic Cloud Dock 2 lets you share up to 2 independent 2.5 inch disks over a high speed 10G Ethernet network. Just plug in SATA HDDs and SSDs, or extreme performance U.2 disks for incredibly fast file reading and writing. You can also sync files globally using Dropbox and Google Drive sync and view all storage, connection and sync activity in real time on a display connected to the HDMI monitor port. Blackmagic Cloud Dock 2 has 2 10G Ethernet ports and an Ethernet over USB-C port in a half width, single rack unit, making it highly portable network storage that's perfect for high end film and television use.

## A\$909

## Connections

#### SSD Interface

2 x removable and hot-swappable 2.5 inch U.2 SSD or SATA.

#### **10G Ethernet Ports**

2 x 10G BASE-T

#### USB-C Port


1

1 x USB 3.0 (up to 5Gb/s). Supports Ethernet Over USB

**HDMI Monitor Outputs** 

#### **Computer Interface**

USB-C or Ethernet for shared file access, configuration and software updates.

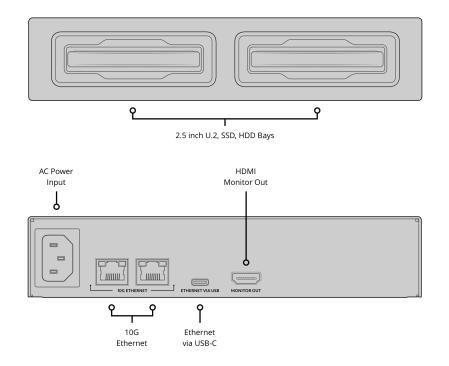

# File Sharing Protocol

<b>Protocol</b> SMB	<b>Computer Connections</b> 50 max.	
Cloud Synchronization		
<b>Compatible Services</b> Dropbox Google Drive		
Storage		
<b>Storage Type</b> Bring your own drive.	<b>External Storage Format</b> ExFAT (Windows/Mac) or HFS+ (Mac) file systems.	
Displays		
HDMI Monitor Out Standards 1080p50, 1080p59.94, 1080p60	<b>Monitor Out Displays</b> Device Name, storage capacity and use, Cloud Sync status, User Activity,	<b>Status Indicator</b> LED bezel indicator lights around SSD media slots.

Hardware Status, storage map, network data rate graph.

## Device Control

**External Control** USB-C or Ethernet for configuration and software updates.

## Software

#### Software Included

Blackmagic Cloud Setup Utility Blackmagic Proxy Generator Lite Internal software upgrade via Blackmagic Cloud Setup using USB-C port

# **Operating Systems**





Mac 14.3 Sonoma or later.

Windows 10, 64-bit. Windows 11.

## Power Requirements

#### **Power Supply**

Internal 100 - 240V AC 50/60Hz with IEC C14 mains input.

#### Power Usage

25W without SSDs.

# Physical Specifications



## **Environmental Specifications**

**Operating Temperature** 

0° to 40° C (32° to 104° F)

**Storage Temperature** -20° to 60° C (-4° to 140° F) **Relative Humidity** 0% to 90% non-condensing

What's Included

Blackmagic Cloud Dock 2 Welcome wallet with QR code for software download

Warranty

12 Month Limited Manufacturer's Warranty.

All items on this website are copyright Blackmagic Design Pty. Ltd. 2024, all rights reserved. All trademarks are property of their respective owners. MSRP includes GST and excludes shipping costs. This website uses remarketing services to advertise on third party websites to previous visitors to our site. You can opt out at any time by changing cookie settings. <u>Privacy Policy</u>

Blackmagic Design Authorized Reseller