

# **Blackmagic Media Dock**



Blackmagic Media Dock accelerates your post production workflow by enabling high speed network sharing and upload from up to 3 Blackmagic Media Modules from Blackmagic URSA Cine cameras. 4 x 10G Ethernet ports allow 4 separate edit stations to connect and edit directly. Blackmagic Media dock also has Ethernet over USB-C, dual AC power inputs for redundancy and an HDMI output for live monitoring of media in real time on a TV or monitor.

\$1,995

#### Connections

#### Interface

3 x removable and hot-swappable Blackmagic Media Modules.

#### **10G Ethernet Ports**

4 x 10G BASE-T

#### **USB-C Port**


1 x USB 3.0 (up to 5Gb/s). Supports Ethernet Over USB


#### **HDMI Monitor Outputs**

1

#### **Computer Interface**

USB-C or Ethernet for shared file access, configuration and software updates.

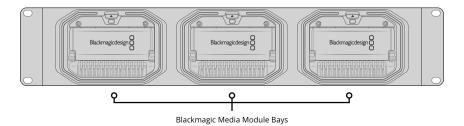

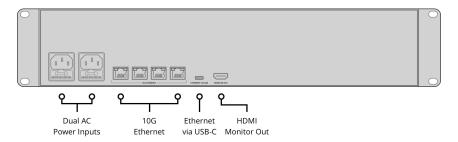

# File Sharing Protocol

Protocol

**Computer Connections** 

SMB 50 max.

# Cloud Synchronization

## **Compatible Services**

Dropbox Google Drive

## Storage

#### **Storage Type**

Up to 3 Blackmagic Media Modules.

#### **External Storage Format**

Blackmagic (formatted in camera)

## Displays

#### **HDMI Monitor Out Standards**

1080p50, 1080p59.94, 1080p60

#### **Monitor Out Displays**

Device Name, storage capacity and use, Cloud Sync status, User Activity, Hardware Status, storage map, network data rate graph.

#### Status Indicator

LED bezel indicator lights around media module bays.

#### **Device Control**

#### **External Control**

USB-C or Ethernet for configuration and software updates.

#### Software

### **Software Included**

Blackmagic Cloud Setup Utility
Blackmagic Proxy Generator Lite
Internal software upgrade via Blackmagic Cloud Setup using USB-C port

## **Operating Systems**



Mac 14.3 Sonoma or later.



Windows 10, 64-bit. Windows 11.

# Power Requirements

## **Power Supply**

Internal 100 - 240V AC 50/60Hz with IEC C14 mains input.


#### **Power Usage**

TBA

# Physical Installation

2 rack units.

# **Physical Specifications**

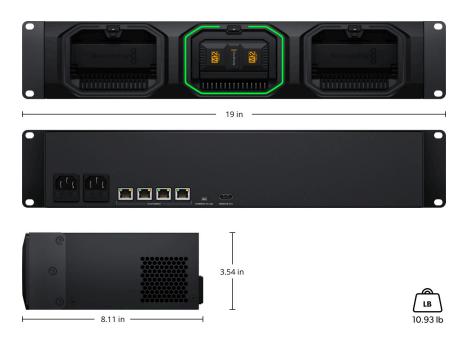

# **Environmental Specifications**

Operating TemperatureStorage TemperatureRelative Humidity0° to 40° C (32° to 104° F)-20° to 60° C (-4° to 140° F)0% to 90% non-condensing

## What's Included

Blackmagic Media Dock Welcome wallet with QR code for software download

Warranty
12 Month Limited Manufacturer's Warranty.
All items on this website are copyright Blackmagic Design Pty. Ltd. 2024, all rights reserved. All trademarks are property of their respective owners. MSRP includes duties, but excludes sales tax and shipping costs. This website uses remarketing services to advertise on third party websites to previous visitors to our site. You copt out at any time by changing cookie settings. Privacy Policy
Blackmagic Design Authorized Reseller