

Exclusively available from BAYVIEW TECHNOLOGIES PTY LTD

PH: 03 9462 4077

website: www.bayviewtech.com.au

QLD: 0417 764 268

email: brett@bayviewtech.com.au

NSW: 0417 330 729


email: vic@bayviewtech.com.au

VIC: 0432 532 955

email: matt@bayviewtech.com.au

BVT-CAB05

RS 485

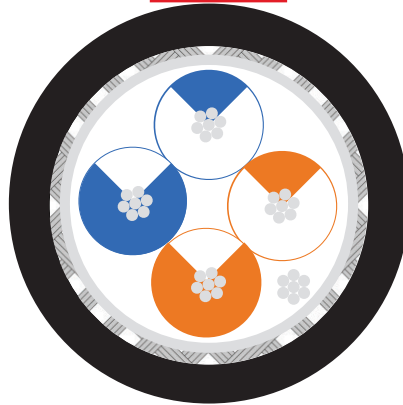

Part Number:	BVT-CAB05
Pair Count:	2 Pair
Conductor:	Tinned Copper
Size:	24AWG
Stranding:	7/0.20
Insulation:	Polyethylene
Insulation Thickness:	0.60mm ± 0.05mm
Pair Identification:	White/Blue & Blue/White
Overall Screen:	Aluminium/Polyester Foil Screen + 90% Tinned Copper Braid 24AWG Tinned Copper Drain Wire
Sheath:	PVC
Sheath Colour:	Black
Diameter mm (Nom)	8.15mm ± 0.15mm
Temperature Rating °C	-30°C to +80°C
Nominal Impedance (Ω)	120
Nom. Capacitance Cond to Cond pF/m	42.56
Nom. Capacitance Cond to Shield pF/m	76.25
Nom. Conductor DC Resistance Ω/km @ 20°C	78.8
Packaging	305m Reel
UL Specification	CM
UL Flame Test	UL 1685
RoHS Compliant	Yes
Proposed Jacket Print	BVTCABLES.COM.AU BVT-CAB05 CM 2PR 24AWG Foil + Braid RS-485 <Manufacture Date> <Metre Mark>

Document/Product Type:	BVT-CAB05	Page No:	Page 1/1
Date:	29/11/23	Revision:	D